



**Features**

- Compliant with AEC-Q200 Rev-C- Stress Test Qualification for Passive Components in Automotive Applications
- Fast tripping resettable circuit protection
- Surface mount packaging for automated assembly
- Small footprint size (1210)
- RoHS compliant\* and halogen free\*\*
- Agency recognition  

**PRCP-USMF Series - Polymer Resettable Circuit Protectors**

**Electrical Characteristics**

Model	V max. Volts	I max. Amps	I <sub>hold</sub>	I <sub>trip</sub>	Resistance		Max. Time To Trip		Tripped Power Dissipation
			Amperes at 23 °C		Ohms at 23 °C		Amperes at 23 °C	Seconds at 23 °C	Watts at 23 °C
			Hold	Trip	R <sub>Min.</sub>	R <sub>1Max.</sub>			Typ.
PRCP-USMF005	30	10	0.05	0.15	2.800	50.000	0.25	1.50	0.6
PRCP-USMF010	30	10	0.10	0.30	0.800	15.000	0.50	0.60	0.6
PRCP-USMF020	30	10	0.20	0.40	0.400	5.000	8.00	0.02	0.6
PRCP-USMF035	6	40	0.35	0.75	0.200	1.300	8.00	0.20	0.6
PRCP-USMF050	13.2	40	0.50	1.00	0.180	0.900	8.00	0.10	0.6
PRCP-USMF075	6	40	0.75	1.50	0.070	0.450	8.00	0.10	0.6
PRCP-USMF110	6	40	1.10	2.20	0.050	0.210	5.00	1.00	0.6
PRCP-USMF150***	6	40	1.50	3.00	0.030	0.110	5.00	5.00	0.6

\*\*\* UL and TÜV

**Environmental Characteristics**

Operating Temperature..... -40 °C to 85 °C  
 Maximum Device Surface Temperature in Tripped State..... 125 °C  
 Passive Aging..... +85 °C, 1000 hours..... ±5 % typical resistance change  
 Humidity Aging..... +85 °C, 85 % R.H. 1000 hours..... ±5 % typical resistance change  
 Thermal Shock..... +85 °C to -40 °C, 20 times..... ±10 % typical resistance change  
 Solvent Resistance..... MIL-STD-202, Method 215..... No change  
 Vibration..... MIL-STD-883C, Method 2007.1,..... No change  
 Condition A

**Test Procedures And Requirements For Model PRCP-USMF Series**

Test	Test Conditions	Accept/Reject Criteria
Visual/Mech.....	Verify dimensions and materials.....	Per P.R.C.P. physical description
Resistance.....	In still air @ 23 °C.....	R <sub>min</sub> ≤ R ≤ R <sub>1max</sub>
Time to Trip.....	At specified current, V <sub>max</sub> , 23 °C.....	T ≤ max.time to trip (seconds)
Hold Current.....	30 min at I <sub>hold</sub> .....	No trip
Trip Cycle Life.....	V <sub>max</sub> , I <sub>max</sub> , 100 cycles.....	No arcing or burning
Trip Endurance.....	V <sub>max</sub> , 48 hours.....	No arcing or burning
Solderability.....	ANSI/J-STD-002.....	95% min. coverage

UL File Number..... E300792

TÜV Certificate Number..... R50383882

\* RoHS Directive 2015/863, Mar. 31 2015 and Annex.

\*\* To be considered halogen free, (a) the Bromine (Br) content is 900 ppm or less;

(b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less. Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Customers should verify actual device performance in their specific applications.

## Applications

- Game consoles
- PC motherboards
- USB port protection-USB 2.0,3.0 & OTG
- HDMI 1.4 Source protection
- IEEE 1394 ports
- Mobile phones
- Digital cameras



# PRCP-USMF Series - Polymer Resettable Circuit Protectors

## Product Dimensions

Model	A		B		C		D
	Min.	Max.	Min.	Max.	Min.	Max.	Min.
PRCP-USMF005	$\frac{3.00}{(0.118)}$	$\frac{3.43}{(0.135)}$	$\frac{2.35}{(0.093)}$	$\frac{2.80}{(0.110)}$	$\frac{0.80}{(0.031)}$	$\frac{1.1}{(0.043)}$	$\frac{0.30}{(0.012)}$
PRCP-USMF010	$\frac{3.00}{(0.118)}$	$\frac{3.43}{(0.135)}$	$\frac{2.35}{(0.093)}$	$\frac{2.80}{(0.110)}$	$\frac{0.80}{(0.031)}$	$\frac{1.1}{(0.043)}$	$\frac{0.30}{(0.012)}$
PRCP-USMF020	$\frac{3.00}{(0.118)}$	$\frac{3.43}{(0.135)}$	$\frac{2.35}{(0.093)}$	$\frac{2.80}{(0.110)}$	$\frac{0.80}{(0.031)}$	$\frac{1.1}{(0.043)}$	$\frac{0.30}{(0.012)}$
PRCP-USMF035	$\frac{3.00}{(0.118)}$	$\frac{3.43}{(0.135)}$	$\frac{2.35}{(0.093)}$	$\frac{2.80}{(0.110)}$	$\frac{0.55}{(0.022)}$	$\frac{0.85}{(0.033)}$	$\frac{0.30}{(0.012)}$
PRCP-USMF050	$\frac{3.00}{(0.118)}$	$\frac{3.43}{(0.135)}$	$\frac{2.35}{(0.093)}$	$\frac{2.80}{(0.110)}$	$\frac{0.55}{(0.022)}$	$\frac{0.85}{(0.033)}$	$\frac{0.30}{(0.012)}$
PRCP-USMF075	$\frac{3.00}{(0.118)}$	$\frac{3.43}{(0.135)}$	$\frac{2.35}{(0.093)}$	$\frac{2.80}{(0.110)}$	$\frac{0.55}{(0.022)}$	$\frac{0.85}{(0.033)}$	$\frac{0.30}{(0.012)}$
PRCP-USMF110	$\frac{3.00}{(0.118)}$	$\frac{3.43}{(0.135)}$	$\frac{2.35}{(0.093)}$	$\frac{2.80}{(0.110)}$	$\frac{0.55}{(0.022)}$	$\frac{0.85}{(0.033)}$	$\frac{0.30}{(0.012)}$
PRCP-USMF150	$\frac{3.00}{(0.118)}$	$\frac{3.43}{(0.135)}$	$\frac{2.35}{(0.093)}$	$\frac{2.80}{(0.110)}$	$\frac{0.40}{(0.016)}$	$\frac{0.85}{(0.033)}$	$\frac{0.30}{(0.012)}$

Packaging:3000 pcs.per reel.

UNIT =  $\frac{\text{MM}}{(\text{INCHES})}$

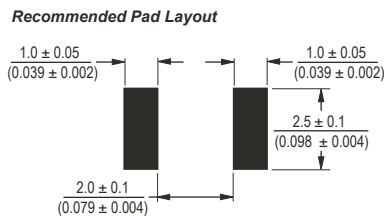

Terminal material:  
Electroless Ni under immersion Au

Termination pad solderability:  
Standard Au finish:  
Meets ANSI/J-STD-002 Category 2.

Recommended Storage:  
40 °C max./70 % RH max.

## Thermal Derating Chart- I<sub>hold</sub> / I<sub>trip</sub> (Amps)


Model	Ambient Operating Temperature								
	-40 °C	-20 °C	0 °C	23 °C	40 °C	50 °C	60 °C	70 °C	85 °C
PRCP-USMF005	0.08 / 0.24	0.07 / 0.21	0.06 / 0.18	0.05 / 0.15	0.04 / 0.12	0.04 / 0.12	0.03 / 0.09	0.03 / 0.09	0.02 / 0.06
PRCP-USMF010	0.15 / 0.45	0.13 / 0.39	0.12 / 0.36	0.10 / 0.30	0.09 / 0.27	0.08 / 0.24	0.07 / 0.21	0.06 / 0.18	0.05 / 0.15
PRCP-USMF020	0.32 / 0.64	0.28 / 0.56	0.24 / 0.48	0.20 / 0.40	0.18 / 0.36	0.16 / 0.32	0.14 / 0.28	0.12 / 0.24	0.10 / 0.20
PRCP-USMF035	0.51 / 1.09	0.46 / 0.99	0.40 / 0.86	0.34 / 0.75	0.30 / 0.64	0.27 / 0.58	0.24 / 0.51	0.22 / 0.47	0.18 / 0.39
PRCP-USMF050	0.76 / 1.52	0.66 / 1.32	0.58 / 1.16	0.48 / 1.00	0.42 / 0.84	0.38 / 0.76	0.35 / 0.70	0.29 / 0.58	0.23 / 0.52
PRCP-USMF075	1.10 / 2.20	0.97 / 1.94	0.86 / 1.72	0.72 / 1.50	0.64 / 1.28	0.58 / 1.16	0.55 / 1.10	0.47 / 0.94	0.39 / 0.78
PRCP-USMF110	1.60 / 3.20	1.42 / 2.84	1.26 / 2.52	1.10 / 2.20	0.94 / 1.88	0.86 / 1.72	0.80 / 1.60	0.70 / 1.40	0.58 / 1.16
PRCP-USMF150	2.30 / 4.60	2.02 / 4.04	1.76 / 3.52	1.43 / 3.00	1.24 / 2.48	1.11 / 2.22	1.00 / 2.00	0.85 / 1.70	0.65 / 1.30

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Customers should verify actual device performance in their specific applications.

# PRCP-USMF Series - Polymer Resettable Circuit Protectors


## Solder Reflow Recommendations

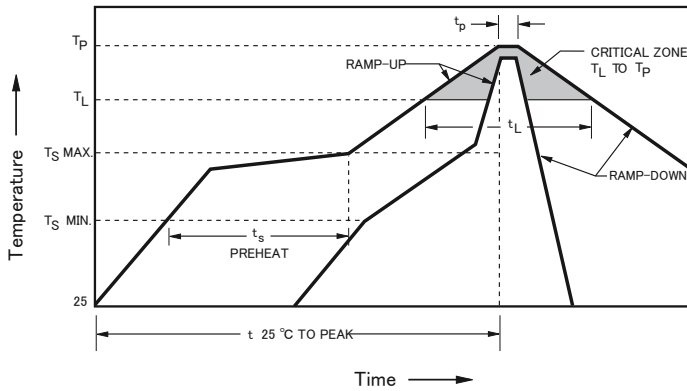

- Notes:
- PRCP-USMF models are intended for reflow soldering (including, but not limited to heating plate, hot air, IR, nitrogen, and vapor phase).
  - Wave soldering is permissible only if the device is on the top of the PCB, opposite the heat source.
  - Hand soldering is not recommended for these devices.
  - All temperatures refer to the topside of the device, measured on the device body surface.
  - If reflow temperatures exceed the recommended profile, devices may not meet the published specifications.
  - Compatible with Pb and Pb-free solder reflow profiles.
  - Excess solder may cause a short circuit.

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate ( $T_{s\ max}$ to $T_p$ )	3 °C / second max.
PREHEAT: Temperature Min. ( $T_{s\ min}$ ) Temperature Max. ( $T_{s\ max}$ ) Time ( $T_{s\ min}$ to $T_{s\ max}$ ) ( $t_s$ )	150 °C 200 °C 60~180 seconds
TIME MAINTAINED ABOVE: Temperature ( $T_L$ ) Time ( $t_L$ )	217 °C 60~150 seconds
Peak Temperature ( $T_p$ )	260 °C
Time within 5 °C of Actual Peak Temperature ( $t_p$ )	20~40 seconds
Ramp-Down Rate	6 °C / second max.
Time 25 °C to Peak Temperature	8 minutes max.

## Typical Time to Trip at 23 °C

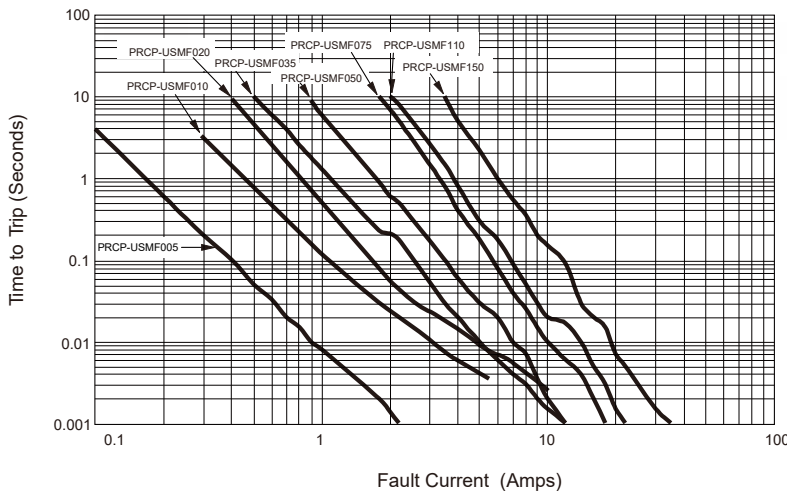

The Time to Trip curves represent typical performance of a device in a simulated application environment. Actual performance in specific customer applications may differ from these values due to the influence of other variables.

## How to Order

PRCP - USMF 010 -2 E

Product Designator

Series USMF= 1210 Surface Mount Component


Hold Current,  $I_{hold}$  005-150 (0.05-1.50 Amps)

Packaging Packaged per EIA 481-1  
-2 = Tape and Reel

Halogen Free  
Non Hidden Foil

## Typical Part Marking

Represents total content. Layout may vary.




PART IDENTIFICATION:  
PRCP-USMF005 = 0  
PRCP-USMF010 = 1  
PRCP-USMF020 = 2  
PRCP-USMF035 = 3  
PRCP-USMF050 = 4  
PRCP-USMF075 = 5  
PRCP-USMF110 = 6  
PRCP-USMF150 = 8

BIWEEKLY DATE CODE:  
WEEK 1 AND 2 = A  
WEEK 51 AND 52 = Z

Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Customers should verify actual device performance in their specific applications.

# PRCP-USMF Series Tape and Reel Specifications

Tape Dimensions	PRCP-USMF Series per EIA 481-2
W	$8.0 \pm 0.3$ (0.315 ± 0.012)
P <sub>0</sub>	$4.0 \pm 0.1$ (0.157 ± 0.004)
P <sub>1</sub>	$4.0 \pm 0.1$ (0.157 ± 0.004)
P <sub>2</sub>	$2.0 \pm 0.05$ (0.079 ± 0.002)
A <sub>0</sub>	$2.76 \pm 0.10$ (0.109 ± 0.004)
B <sub>0</sub>	$3.50 \pm 0.10$ (0.138 ± 0.004)
B <sub>1</sub> max.	$4.35$ (0.171)
D <sub>0</sub>	$1.5 + 0.1 / -0.0$ (0.059 + 0.004 / -0)
F	$3.5 \pm 0.05$ (0.138 ± 0.002)
E <sub>1</sub>	$1.75 \pm 0.10$ (0.069 ± 0.004)
E <sub>2</sub> min.	$6.25$ (0.246)
T max.	$0.6$ (0.024)
T <sub>1</sub> max.	$0.1$ (0.004)
K <sub>0</sub>	$1.07 \pm 0.10$ (0.042 ± 0.004)
Leader min.	$390$ (15.35)
Trailer min.	$160$ (6.30)
Reel Dimensions	
A max.	$185$ (7.283)
N min.	$50$ (1.97)
W <sub>1</sub>	$8.4 + 1.5 / -0.0$ (0.331 + 0.059 / -0.0)
W <sub>2</sub> max.	$14.4$ (0.567)

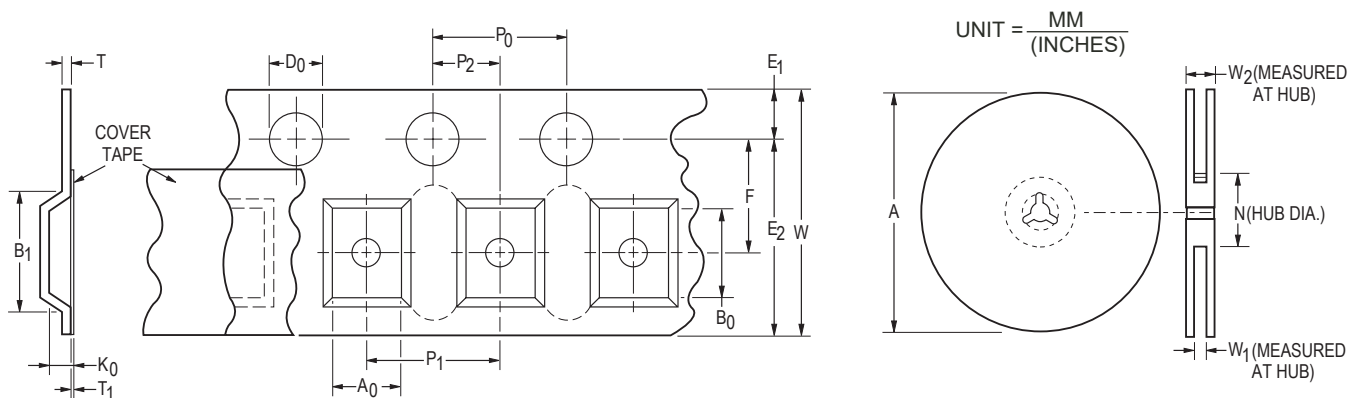

Specifications are subject to change without notice.  
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
 Customers should verify actual device performance in their specific applications.